


## Attenuator Pad, 1002 MHz, SPB Style

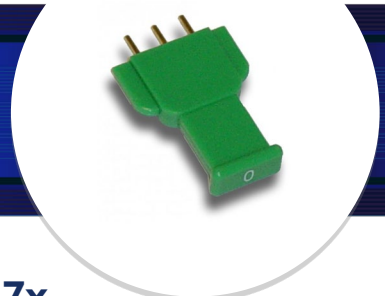

For ARRIS<sup>®</sup>/C-COR<sup>®</sup> Flex Max900, Flex Max340, LN-SM7x,  
FlexNet 700/800/E900 Amplifiers

PARAMETER	SPECIFICATION	Unit
Passband	5-1002	MHz
Flatness	+/- 0.3	dB
Return Loss	>18 dB	dB
Length	1.1	In

### 1002 MHz SPB Attenuator Pads – Height 1.1” – Symmetrical Pin Spacing

BBI Part #	Values	BBI Part #	Values	BBI Part #	Values
640000M	0 dB	640807M	7 dB	640814M	14 dB
640801M	1 dB	640808M	8 dB	640815M	15 dB
640802M	2 dB	640809M	9 dB	640816M	16 dB
640803M	3 dB	640810M	10 dB	640817M	17 dB
640804M	4 dB	640811M	11 dB	640818M	18 dB
640805M	5 dB	640812M	12 dB	640819M	19 dB
640806M	6 dB	640813M	13 dB	640820M	20 dB
				640875M	75 ohm