


## Bode Board, 1 GHz

**For Cisco® GainMaker® Line Extender Amplifiers and  
Broadband International® 2-PAC-C Line Extenders**

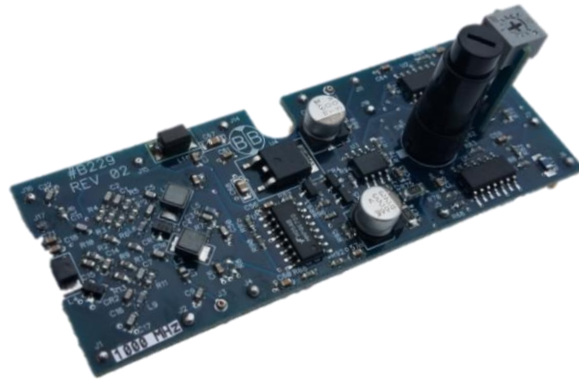

Setup of the Bode is identical to the OEM products.

The Bode is available in 1 GHz models and can be installed in 870 MHz or 1 GHz OEM amplifiers.

The variable potentiometer is easy to adjust, with 10 dB of control range.

Position controls include thermal, AGC, or manual positions.

Many analog or QAM frequencies to accompany this Bode Board are available or can be special ordered to fit most system requirements.

OEM P.N.	BBI P.N.	Description
229100CC	229100CC	BBI 2-PAC-C Line Extender (with B229EB-CC Daughter Board)
592333	229100	Cisco® GainMaker® Line Extender (with B229EB Daughter Board)