


1 GHz Line Extenders – 2PAC-S (RG)

Replaces/Upgrades Scientific Atlanta®/Cisco®
550/625/750/870 MHz Systems

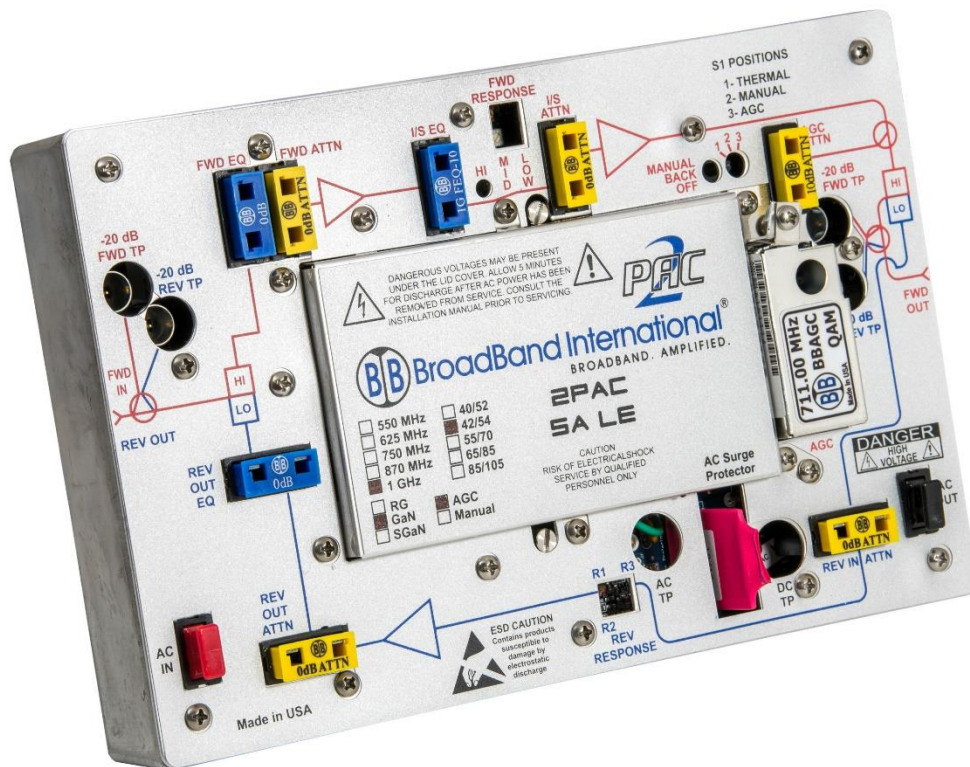

Features:

- Specified bandwidth performance from 550 MHz to 1 GHz
- Utilizes FAST-PAC™ style plug-in equalizers and pads
- Multiple options for return path bandwidth
- GaAs or GaN plug-in hybrid technology
- Plug-in diplex filters for future reverse split changes

The 2PAC-S enhanced system amplifier module from Broadband International® is designed to drop into any existing Scientific Atlanta® I, II, III, or GainMaker® line extender housing. The forward bandwidth is up to 1 GHz and may be optimized for any bandwidth from 550 MHz to 1 GHz. This is accomplished by alignment of the interstage response network and by the type of cable equalizers utilized. Performance may be optimized by the choice of GaAs or GaN hybrids to achieve different operating gains. The amplifier accepts any standard FAST-PAC™ style equalizers and pads.

2PAC-S (GaN) – 1 GHz Line Extenders for Replacing/Upgrading Scientific Atlanta® and Cisco® 550/625/750/870 MHz Systems



The use of plug-in GaAs or GaN hybrids makes this system amplifier easier to service than the OEM models now offered utilizing surface-mounted gain blocks. The internal losses of our design have been minimized to provide the lowest possible RF distortions. The 2PAC-S is designed as a drop in solution for older 400 to 870 MHz systems.

The interstage EQ and pad sets the output gain and slope for maximum performance. RF test points are provided at both input and output ports. The forward output RF test port may also be utilized as a reverse sweep input port with suitable RF sweep test equipment. All the test ports are directional couplers with a resistive pad to provide an accurate -20 dB reference level.

The diplex filters are plug-in independent filters that can be changed in the field at a future date if a different reverse split is desired.


2PAC-S (RG) – FAST-PAC™ LE Amplifier Conversion Performance to 1 GHz				
Analog Channels	79	95	110	Return
2PAC-S Line Extender	-20 dB (+-1 dB) Dual Test Points on ALL Ports			
Frequency Response (dB)	+/- 0.75	+/- 0.75	+/- 0.75	+/- 0.5
Return Loss (-dB)	16	16	16	16
Noise Figure (-dB)	8	8	8	
Operational Gain - Manual	38	38	38	20
Operational Gain - Thermal	34	34	34	20
Operational Gain - AGC	33	33	33	20
Slope Range (dB)	8 (+EQ)	8 (+EQ)	8 (+EQ)	EQ
AC Hum Mod @ 10A (-dB)[15A max]	-65	-65	-65	-65
Output Level (typical)	51	51	51	40
Output Slope (typical)	14.5	14.5	14.5	N/A
Input Hybrid Technology	GaAs PP	GaAs PP	GaAs PP	N/A
Output Hybrid Technology	GaAs PP	GaAs PP	GaAs PP	N/A
Composite Triple Beat (AGC)	70	68	65	90
Cross-Modulation (AGC)	65	63	62	82
Composite Second Order (AGC)	73	71	69	80

2PAC-S	Regular Gain (RG)		AC Voltage										
	I DC		90	85	80	75	70	65	60	55	50	45	40
Manual	0.82	AC current draw	0.44	0.46	0.47	0.49	0.52	0.55	0.58	0.62	0.67	0.74	0.82
AGC	0.92	AC current draw	0.47	0.5	0.52	0.55	0.57	0.6	0.65	0.69	0.75	0.82	0.91

2PAC-S (RG) Diagram and Ordering Information

The following Required Accessories highlighted in yellow must be ordered separately (all other pads and equalizers are provided).

BROADBAND INTERNATIONAL 2 PAC - AGC

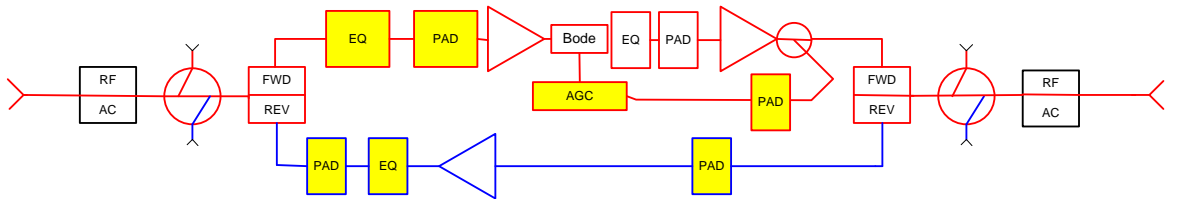

The Broadband International® 2PAC-S amplifier can be configured in many different frequencies and options. Please consult your account representative for assistance with specific plug-in options.