



# Tilt Generator, 862 MHz

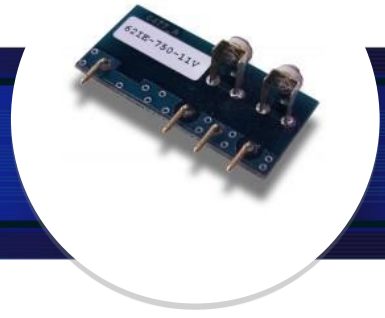

For Magnavox<sup>®</sup> System Amplifiers

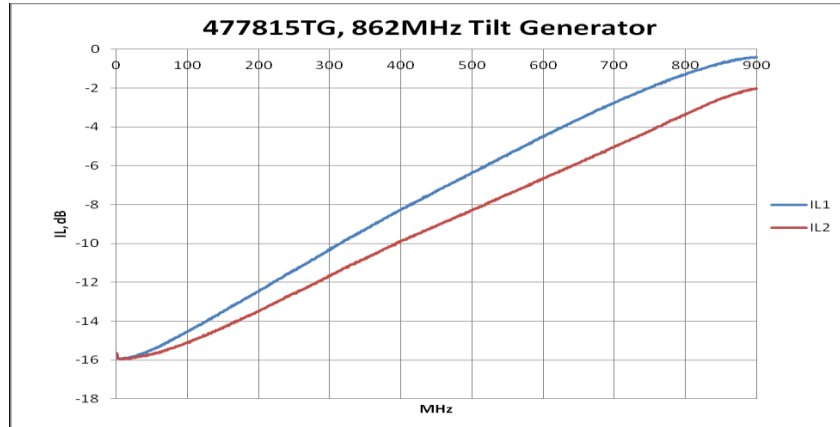

Typical Response Adjustment Range

		50 MHz	100 MHz	300 MHz	450 MHz	550 MHz	650 MHz	750 MHz	862 MHz
477807TG 862 MHz Tilt Generator	Min Loss Adjustments	7.8	7.4	5.4	3.9	3	2.1	1.2	0.7
	Max Loss Adjustments	7.8	7.3	5.7	4.4	3.9	3.3	2.8	2.5
477808TG 862 MHz Tilt Generator	Min Loss Adjustments	8.7	8.3	6.1	4.7	3.8	2.8	1.6	0.6
	Max Loss Adjustments	8.8	8.4	6.5	5.5	5.1	4.8	4.3	3
477809TG 862 MHz Tilt Generator	Min Loss Adjustments	9.6	9.1	6.5	4.9	3.8	2.7	1.5	0.6
	Max Loss Adjustments	9.7	9.2	7.1	5.9	5.3	4.7	4.1	3.3
477810TG 862 MHz Tilt Generator	Min Loss Adjustments	10.7	10.2	7.4	5.4	4	2.7	1.4	0.6
	Max Loss Adjustments	10.8	10.3	7.9	6.3	5.3	4.1	3.9	3.5
477811TG 862 MHz Tilt Generator	Min Loss Adjustments	11.7	11.1	8	5.8	4.3	2.8	1.3	0.6
	Max Loss Adjustments	11.8	11.3	8.9	7.3	6.4	5.5	4.7	3.7
477812TG 862 MHz Tilt Generator	Min Loss Adjustments	12.7	12	8.4	6	4.4	2.8	1.4	0.6
	Max Loss Adjustments	12.7	12.2	9.3	7.5	6.4	5.3	4.3	3.3
477813TG 862 MHz Tilt Generator	Min Loss Adjustments	13.6	12.8	8.4	5.5	3.8	2.3	1.2	0.6
	Max Loss Adjustments	13.7	13.2	10.2	8	6.8	5.5	4.1	3.7
477814TG 862 MHz Tilt Generator	Min Loss Adjustments	14.3	13.1	8.9	6.1	4.4	2.7	1.4	0.6
	Max Loss Adjustments	14.7	14.1	11.1	8.9	7.6	6.3	5.2	4
477815TG 862 MHz Tilt Generator	Min Loss Adjustments	15.5	14.5	10.3	7.3	5.4	3.6	2	0.6
	Max Loss Adjustments	15.1	15.1	11.6	9.1	7.4	5.8	4.2	4