


15 Ampere Slow-Blow Fuse



For Broadband International[®] 4PAC-G,
 2PAC-G (1.2 GHz only), 2PAC-C, and Cisco[®] GainMaker[®]
 System Amplifiers, Line Extenders, and Nodes

Specifications

15 Amp Slow Blow Fuse
 Red (R) or Black (B)
 Total Length: 1.7"
 Plastic Base Length: 1.35"

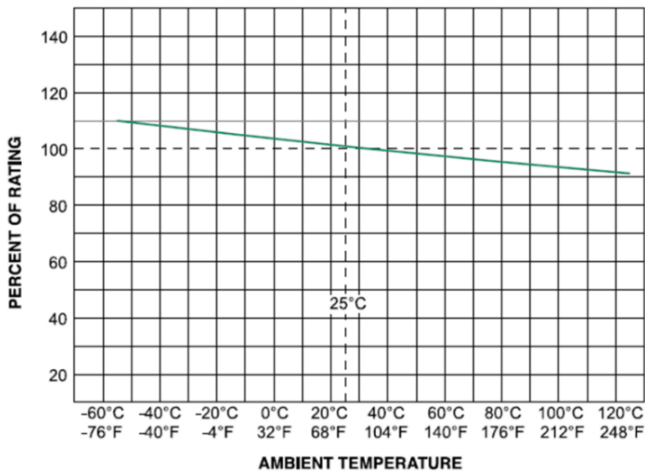

| % of Ampere Rating | Rating Opening Time |
|--------------------|----------------------------------|
| 100% | 4 Hours, Min. |
| 200% | 1 Sec., Min.; 60 Sec., Max. |
| 300% | 0.2 Sec., Min.; 3 Sec., Max. |
| 800% | 0.002 Sec., Min.; 0.1 Sec., Max. |

| OEM P.N. | BBI P.N. | Values |
|----------|----------|--------------------------------|
| 715124 | 200015 B | 15 Amp - 1 pc - Black |
| 735640 | 200015 R | 15 Amp - 1 pc - Red |
| 735633 | 200215 | 15 Amp - 2 pc - 1 Red, 1 Black |
| 735632 | 200415 | 15 Amp - 4 pc - 1 Red, 3 Black |