


# Reverse Combined/Redundant Single Combined Board





## For Motorola SG 2440 Optical Nodes

### Single Combined and Redundant Single Combined Board

- All four RF return lines are combined into a single optical upstream transmitter.
- The single optical transmitter must be located in lid position B.
- The single combined return transmitters with redundant option configuration is installed in lid position B and A.

Single combined return, redundant option configuration block diagram

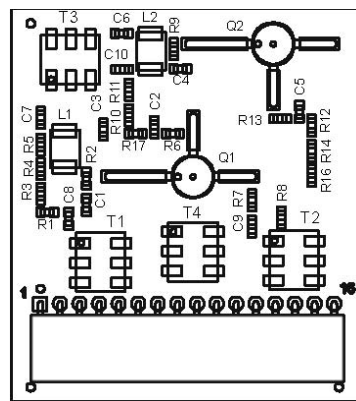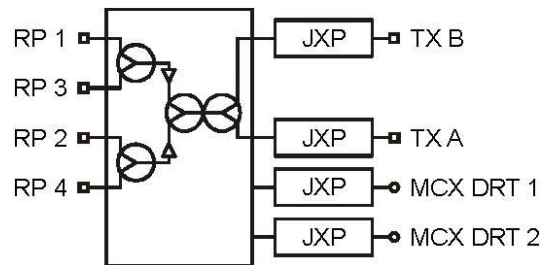

OEM P.N.	BBI P.N.	Values
474991-001	398100	