


## 1.2 GHz System Amplifier Housing with Power Supply and Umbilical Cord/Ladder Tray

For Broadband International®  
 1.2 GHz System Amplifiers and  
 OEM GainMaker® 1 GHz and 1.2 GHz Amplifiers

OEM P/N	BBI P/N	Description
EOL	41-32PSLD	Broadband International® 4PAC-G Housing with 2.5 AMP Power Supply, Ladder Tray, and Umbilical Cord for Broadband International® 1.2 GHz System Amplifier/Housings and OEM Gainmaker® System Amplifiers

The complete system includes the Housing, 15-Ampere Seizure Screws, 2.5-Ampere Power Supply, Umbilical Cord, and Ladder Tray.

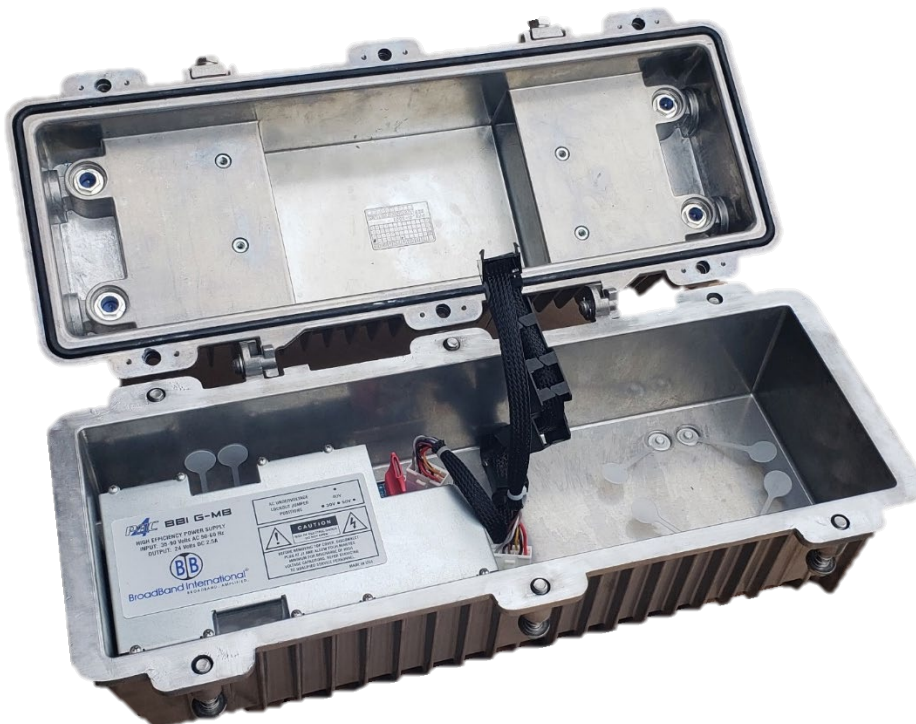

### Features:

- AC and DC test points provided directly on the Power Supply
- 60 and 90 volt AC powering capability
- Selectable AC under voltage lockout
- 30 volt lockout is for 60 volt systems (shipped in 30 volt lockout)
- 40 and 50 volt lockout are for 90 volt systems (can be changed in the field)
- Operating temp from -40° to 140°F (-40° to 60°C)
- +24 volts DC 2.5-Ampere high-efficiency Power Supply
- Optional Crowbar located on the Power Supply
- Replaces existing Scientific Atlanta® II/III, Cisco® GainMaker®, or Broadband International® housing